

# TILLERS FOR SPECIAL BUILT CARRIERS

## 200S



from 250 to 300 HP



Ø 30 cm max



D 30 cm

## FORESTRY TILLER FOR HYDRAULIC CARRIERS.


The optimum weight and various available widths , the 200S can adapt to a wide range of machines, and is the ideal solution for many applications.

The transmission with side gearbox allows the rotor to run at a lower speed compared to the conventional belt forestry mulchers. This makes the transmission of the 200S much more reliable.



### STANDARD EQUIPMENT AND OPTIONS

Considering the various available options and high level of customization, the final configuration will be specified upon request

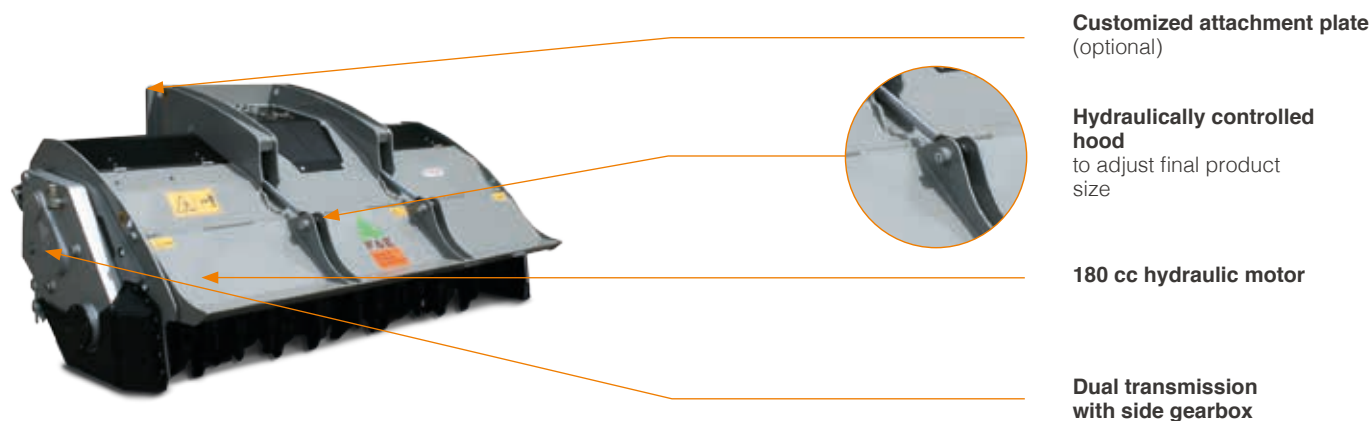

MODEL	Power (HP)		Flow rate (L/min)		Pressure (bar)		Working width (mm)	Total width (mm)	Weight (kg)	Max working depth (mm)	Max shredding diameter (mm)	No. teeth B/3+C/SS
	min	max	min	max	min	max						
<b>200/S - 225</b>	250	300	350	400	320		2320	2680	3050	300	300	82+4
<b>200/S - 250</b>	250	300	350	400	320		2560	2920	3250	300	300	96+4

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.