

# EXCAVATOR MULCHERS

## PML/HY



from 20 to 35 HP



Ø 2 cm max



from 1,5 to 3,5 t

### MULCHER WITH HAMMER/FLAIL ROTOR FOR EXCAVATORS.

FAE's smallest excavator mulcher is designed for cleaning up brambles and shrubs.

This mulcher can be equipped with a standard 8cc or optional 16cc motor for mounting on excavators ranging from 1.3 to 3.5 tons. The flow control valve ensures an easy and rapid mounting of the mulcher without adjustments or modifications to the hydraulic system of the excavator.




#### STANDARD EQUIPMENT

- Enclosed machine body
- Belt transmission
- 8cc gear motor with integrated anticavitation valve
- Hydraulic hoses
- Welded counter blade
- Rear roller
- Self leveling protection rubber
- Possibility to have the rotor equipped with PML hammers or Y-fails

#### OPTIONS

- 16cc gear motor with integrated anticavitation valve
- Customized attachment bracket
- Attachment plate with self leveling device
- Multiple tooth options

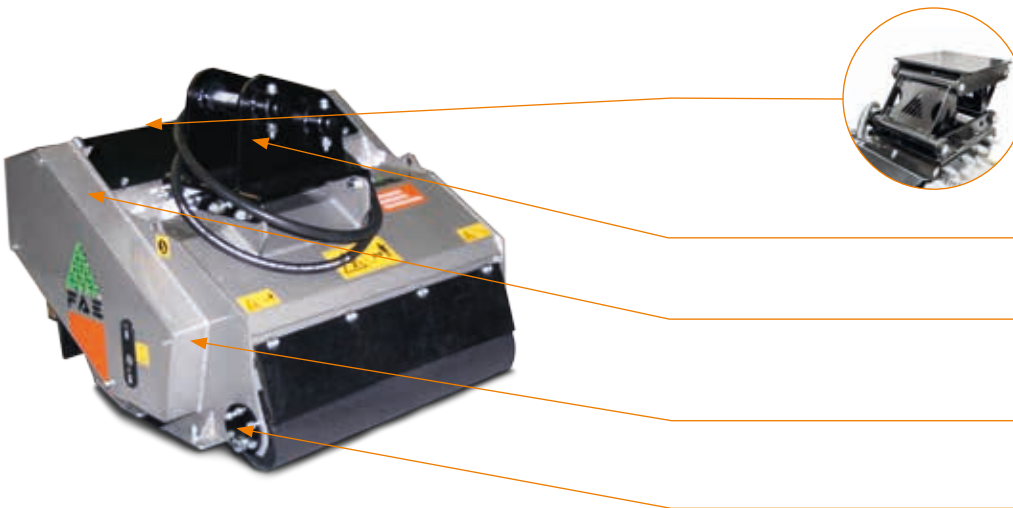

**Attachment plate with self leveling device** (optional)  
to adapt to all types of terrain

**Customized attachment bracket** (optional)

**Enclosed machine body**

**Steel counter-blades** helps mulch material into a smaller final size

**Self-cleaning support roller**

MODEL	Power (HP)		Flow rate (L/min)		Pressure (bar)		Excavator weight (t.)		Working width (mm)	Weight (kg)	Max shredding diameter (mm)	No. teeth	
	min	max	min	max	min	max	min	max				PML	Y
PML/HY 50	20	35	16	40	150	210	1,5	3,5	500	160	20	8	8
PML/HY 70	25	35	16	40	150	210	2,0	3,5	700	180	20	10	10
PML/HY 90	30	35	16	40	150	210	2,5	3,5	900	200	20	14	14

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.