

# EXCAVATOR MULCHERS

## PMM/EX



from 50 to 100 HP



Ø8 cm max



from 6 to 13 t

### MULCHER WITH HAMMER/FLAIL ROTOR FOR EXCAVATORS.

The PMM/EX is a flail mower used to mulch underbrush, grass and bushes. It is equipped with a variable manual displacement hydraulic piston motor that can be set to the carrier's hydraulic specifications.


The stronger roller supports (optional) ensure the best performance and maximum reliability on difficult terrain. The flow control valve ensures minimal setup of the mulcher without adjustments or modifications to the hydraulic system of the excavator.



STANDARD EQUIPMENT
Enclosed machine body
Belt transmission
32/65cc variable manual displacement hydraulic piston motor with relief and anticavitation valve
Flow control valve
Hood with mechanical adjustment
Adjustable skids
Welded counter blade

Rear roller
Possibility to have the rotor equipped with PML hammers or Y-flails

OPTIONS
Customized attachment bracket
Attachment plate with self leveling device
Stronger bearing for back roller
Multiple flail options

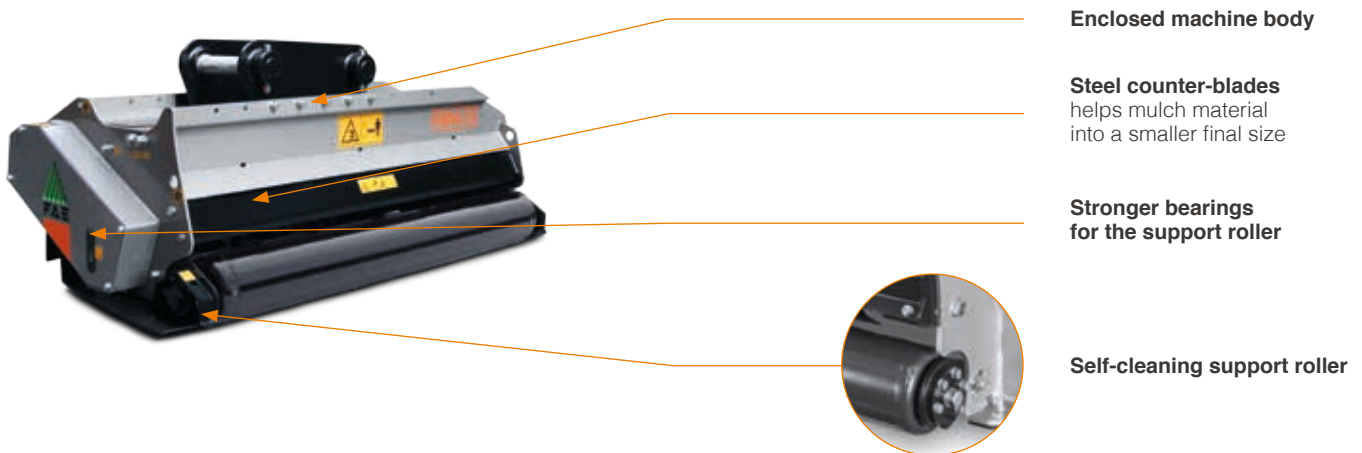

MODEL	Power (HP)		Flow rate (L/min)		Pressure (bar)		Excavator weight (t.)		Working width (mm)	Weight (kg)	Max shredding diameter (mm)	No. teeth	
	min	max	min	max	min	max	min	max				PMM	Y
PMM/EX 100	50	100	60	130	180	250	6	13	1060	520	80	12	12
PMM/EX 125	50	100	60	130	180	250	6	13	1300	600	80	16	16
PMM/EX 150	50	100	60	130	180	250	6	13	1540	680	80	18	18
PMM/EX 175	50	100	60	130	180	250	7	13	1780	760	80	22	22

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.