



from 160 to 400 HP



Ø70 cm max



D50 cm


FORESTRY TILLER WITH FIXED TOOTH ROTOR.

This is the flagship of FAE's Forestry Tiller lineup. The wide rotor can grind stumps up to 70 cm diameter, while the high number of teeth guarantee the best processed material at depths up to 50 cm.

The SSH is built from high quality components and is backed by years of research and newer model development. It has heavy duty, side mounted gearboxes to guarantee it has the longest working life while constantly running in the ground.

STANDARD EQUIPMENT	
Friction clutch on side PTO	Inside lateral protections
PTO shaft with cam clutch	Protection chains
Gearbox with freewheel	
Transmission with side gearbox	
Hydraulic hood	
Flat pressed welded steel counter-blades	
Adjustable Hardox® counter-blade	
Enclosed machine body	
Centralized greasing hub (SSH 200, 225 and 250)	
Hydraulic top link (standard: SSH 200, 225, 250 - optional: SSH 150, 175)	
Z style self ranging system of the PTO drive shaft/gearbox (SSH 200, 225 and 250)	
OPTIONS	
Forestry counter-blade	
Bolted grid on rear hood (SSH 200, 225 and 250)	
Stronger transmission for tractors up to 360-400 HP (SSH 200, 225 and 250)*	
W style self aligning device between PTO drive shaft/gearbox	
Dozing blade (not compatible with roller)	
Hydraulic controlled roller (not compatible with dozing blade)	
Multiple tooth options	

FEATURES

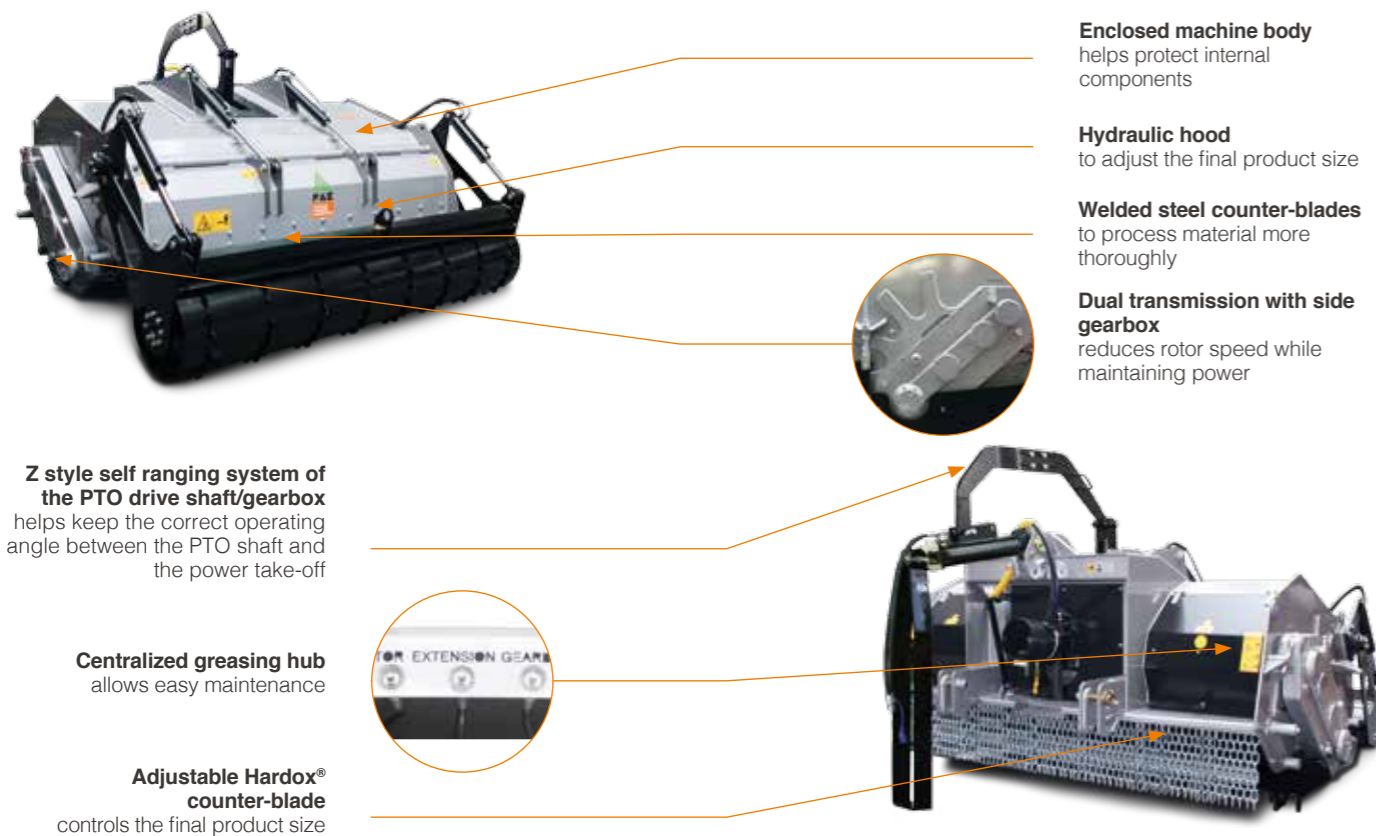

MAIN OPTIONS



MODEL	Power (HP)		PTO (rpm)	Working width (mm)	Total width (mm)	Weight (kg)	Max shredding diameter (mm)	Max working depth (mm)	No. teeth type A/3 + MH
	min	max							
SSH 150	160	280	1000	1600	1980	3670	700	500	58+4
SSH 175	180	280	1000	1840	2220	3920	700	500	66+4
SSH 200	200	400*	1000	2080	2460	4250	700	500	78+4
SSH 225	220	400*	1000	2320	2700	4580	700	500	88+4
SSH 250	240	400*	1000	2560	2940	4850	700	500	98+4

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.