

FORESTRY TILLERS

SSL



from 100 to 220 HP



Ø 30 cm max



D30 cm

FORESTRY TILLER WITH FIXED TOOTH ROTOR.

This is the smallest model in FAE's line of Forestry Tillers. Thanks to its low weight and multiple working width options, the SSL fits a wide range of tractors. The transmission with side gearbox allows the rotor to spin at a lower RPM than a traditional belt driven mulcher. This makes the transmission much more reliable, and ensures a deep, consistent grinding while also lowering tool wear.




STANDARD EQUIPMENT

| |
|--|
| Friction clutch on side PTO |
| PTO shaft with cam clutch |
| Gearbox with freewheel |
| Transmission with side gearbox |
| Hydraulic hood |
| Flat pressed welded steel counter-blades |
| Enclosed machine body |
| Inside lateral protections |
| Protection chains |

OPTIONS

| |
|-----------------------------|
| Hydraulic top link |
| Hydraulic controlled roller |
| Different teeth |

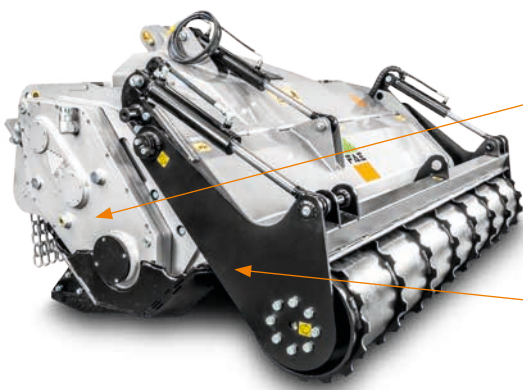

Dual transmission with side gearbox
reduces rotor speed while maintaining power



Hydraulic controlled roller
helps with minor compaction and working uneven terrain

| MODEL | Power (HP) | | PTO (rpm) | Working width (mm) | Total width (mm) | Weight (kg) | Max shredding diameter (mm) | Max working depth (mm) | No. teeth type B/3 + C/3/SS |
|---------|------------|-----|-----------|--------------------|------------------|-------------|-----------------------------|------------------------|-----------------------------|
| | min | max | | | | | | | |
| SSL 150 | 100 | 160 | 1000 | 1580 | 1880 | 2080 | 300 | 300 | 54+4 |
| SSL 175 | 110 | 160 | 1000 | 1820 | 2120 | 2260 | 300 | 300 | 66+4 |
| SSL 200 | 120 | 220 | 1000 | 2060 | 2360 | 2620 | 300 | 300 | 74+4 |
| SSL 225 | 130 | 220 | 1000 | 2300 | 2600 | 2810 | 300 | 300 | 82+4 |
| SSL 250 | 140 | 220 | 1000 | 2540 | 2840 | 2990 | 300 | 300 | 96+4 |

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.