

FORESTRY TILLERS

SSL SPEED



from 100 to 220 HP



Ø30 cm max



D30 cm

FORESTRY TILLER WITH FIXED TOOTH ROTOR.

A Forestry Tiller designed to meet the needs of professionals who require both surface clearing and soil reclamation. This machine allows you to clean up crop residue and grind trees and stumps up to 30 cm diameter and 30 cm deep. The optional push frame mounts to the support roller, while adjustable counter-blades are used to manually control the final product size.




STANDARD EQUIPMENT

Friction clutch on side PTO
PTO shaft with cam clutch
Gearbox with freewheel
Transmission with side gearbox
Hydraulic hood
Welded steel counter-blades
Adjustable counter-blade
Enclosed machine body
Inside lateral protections
Protection chains

OPTIONS

Hydraulic top link
Push frame - (cannot be used without roller)
Hydraulic support roller
Multiple tooth options

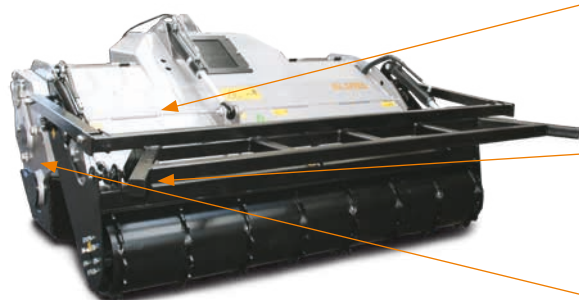

Adjustable counter-blade
for longer working life

Hydraulic controlled roller
(optional) helps with compaction and working uneven terrain

Dual transmission with side gearbox
reduces rotor speed while maintaining power

MODEL	Power (HP)		PTO (rpm)	Working width (mm)	Total width (mm)	Weight (kg)	Max shredding diameter (mm)	Max working depth (mm)	No. teeth type B/3 + C/3/SS
	min	max							
SSL Speed 150	100	160	1000	1580	1880	2000	300	300	44+4
SSL Speed 175	110	160	1000	1820	2120	2160	300	300	50+4
SSL/DT Speed 200	120	220	1000	2060	2360	2600	300	300	58+4
SSL/DT Speed 225	130	220	1000	2300	2600	2810	300	300	66+4
SSL/DT Speed 250	140	220	1000	2540	2840	3030	300	300	74+4

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.