

FORESTRY TILLERS

SSM - SSM/HP



from 150 to 300 HP



Ø50 cm max



D40 cm

FORESTRY TILLER WITH FIXED TOOTH ROTOR.

Designed and built to work with medium to high power tractors, the SSM can grind stumps up to 50 cm diameter and run at a depth of 40 cm. It has an available HP version for tractors up to 300 HP.



STANDARD EQUIPMENT

Friction clutch on side PTO

PTO shaft with cam clutch

Gearbox with freewheel

Transmission with side gearbox

Hydraulic hood

Welded steel counter-blades

Flat pressed welded steel protection counter-blades

Enclosed machine body

Centralized greasing hub

Hydraulic top link

Z style self ranging system of the PTO drive shaft/gearbox

Inside lateral protections

Bigger transmission for tractors up to 360-400 HP (SSM/HP 200, 225 and 250)

Protection chains


OPTIONS

W style self aligning device between PTO drive shaft/gearbox

Dozing blade (not compatible with roller)

Hydraulic controlled roller (not compatible with dozing blade)

Multiple tooth options

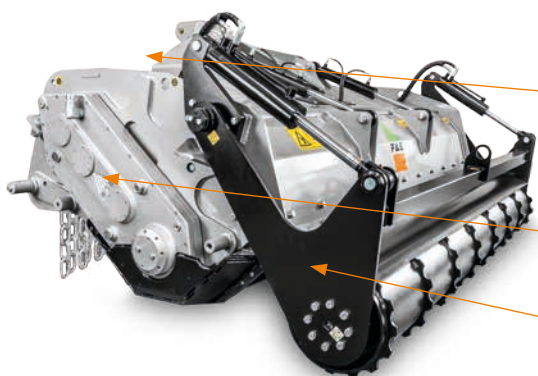

W style self aligning device between PTO drive shaft/gearbox

allows the mulcher to work in several angles without damaging the PTO

Stronger transmission for tractors up to 360-400 HP power

(SSM/HP 200, 225 and 250)

Hydraulic controlled roller

helps with minor compaction and working uneven terrain

MODEL	Power (HP)		PTO (rpm)	Working width (mm)	Total width (mm)	Weight (kg)	Max shredding diameter (mm)	Max working depth (mm)	No. teeth type A/3 + MH
	min	max							
SSM 200	150	250	1000	2080	2410	3090	500	400	76+4
SSM 225	170	250	1000	2320	2650	3340	500	400	88+4
SSM 250	190	250	1000	2560	2890	3590	500	400	102+4
SSM/HP 200	150	300	1000	2080	2410	3140	500	400	76+4
SSM/HP 225	170	300	1000	2320	2650	3390	500	400	88+4
SSM/HP 250	190	300	1000	2560	2890	3640	500	400	102+4

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.