

## EXCAVATOR MULCHERS

# UML/EX - UML/EX/VT



from 90 to 120 HP



Ø 20 cm max



from 14 to 20 t

## FORESTRY MULCHER WITH FIXED TOOTH ROTOR FOR EXCAVATORS.

Thanks to its size, heavy duty construction, reliability and performance, the UML/EX one of FAE's most popular attachments. The enclosed hydraulic door opening and closing system creates a completely enclosed frame that protects the internal components from dust and debris.


### STANDARD EQUIPMENT

Anti dust machine body
Belt transmission
Hydraulic piston motor 63cc with relief and anticavitation valve (UML/EX)
110/60cc variable torque hydraulic piston motor (UML/EX/VT)
Flow control system valve
Hydraulic hood
Welded counter blade
Bolted dual row protection chains
Motor enclosed in frame
Motor integrated into the frame
Supporting service leg

### OPTIONS

Customized setting hydraulic motor (UML/EX/VT)
Diverter valve
Customized attachment bracket
Customized attachment bracket with fixed thumb
Multiple tooth options

## FEATURES



**Steel counter-blades**  
helps mulch material into a smaller final size

**Anti-dust rear door**  
revolutionary system for door opening/closing that prevents dirt from entering into the service areas of the machine




**VT variable torque motor**  
to increase performance and reduce operating costs

**Motor enclosed in frame**  
protected from dirt and damage

**Flow control valve**  
to protect the motor from excessive flow

**VT motor**  
Adjustable motor to obtain the maximum performance out of any excavator

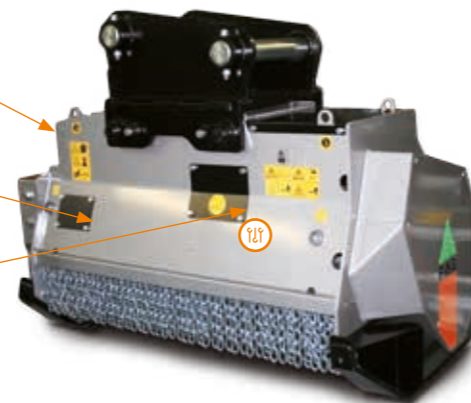

## MAIN OPTIONS



**1 Customized attachment bracket**



**2 Diverter valve**  
to control the opening and closing of the hydraulic door



**3 Additional reinforced side plates**  
for extreme conditions



**4 Customized attachment bracket with fixed thumb**

MODEL	Power (HP)		Flow rate (L/min)		Pressure (bar)		Excavator weight (t)		Working width (mm)	Weight (kg)	Max shredding diameter (mm)	No. teeth	
	min	max	min	max	min	max	min	max				C/3+C/3/SS	I+C/3/SS
UML/EX 100	90	120	110	150	220	350	14	20	1100	980	200	20+2	28+2
UML/EX 125	90	120	110	150	220	350	14	20	1340	1085	200	26+2	36+2
UML/EX 150	100	120	110	150	220	350	14	20	1580	1185	200	32+2	42+2
UML/EX/VT 100*	90	120	120	180	220	350	14	20	1100	980	200	20+2	28+2
UML/EX/VT 125*	90	120	120	180	220	350	14	20	1340	1140	200	26+2	36+2
UML/EX/VT 150*	100	120	120	180	220	350	14	20	1580	1240	200	32+2	42+2

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.  
\*Variable displacement hydraulic motor.

THE BEST SELLER.  
UNDISPUTED MARKET LEADER

