



from 140 to 240 HP



Ø 30 cm max


## FORESTRY MULCHER WITH FIXED TOOTH ROTOR.

A professional mulcher with fixed teeth for processing material up to 30 cm in diameter. The UMM/DT offers a compact size that makes it easy to handle while mulching, especially for difficult applications like steep slopes. This mulcher features a heavy duty frame with protection integrated for the cylinder and hydraulic link. It also features interchangeable counter-blades for easy maintenance and replacement, as well as a centralized greasing hub, push frame with ripper, and adjustable linkage for mounting to a 3 point hitch.


STANDARD EQUIPMENT	
PTO shaft with cam clutch	Cylinder protection
Gearbox with freewheel	Dual row protection chains
Transmission with belts in XPB	
Hydraulic hood	OPTIONS
Forged and hardened interchangeable counter-blades	Frontal attachment
Interchangeable inner antiwear plates in Hardox®	Third row of interchangeable forged and hardened counter-blades
Adjustable skids	W style self aligning device between PTO drive shaft/gearbox
Enclosed machine body	Mechanical push frame
Centralized greasing hub	Hydraulic push frame
Hydraulic top link	Extra ripper for push frame
Z style self ranging system of the PTO drive shaft/gearbox	Special skids to go underground
Hydraulic hoses integrated in the frame	Multiple tooth options



## FEATURES

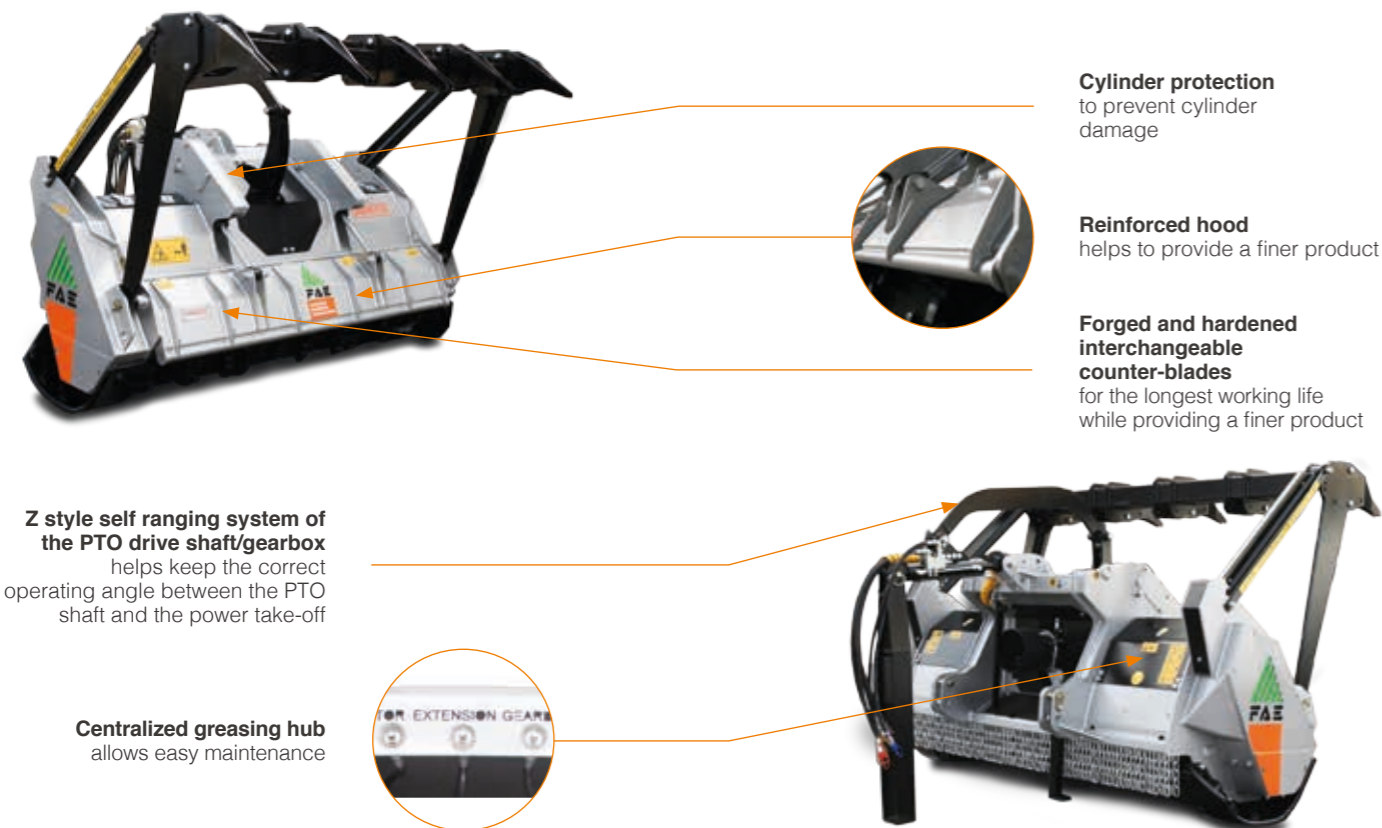

## MAIN OPTIONS

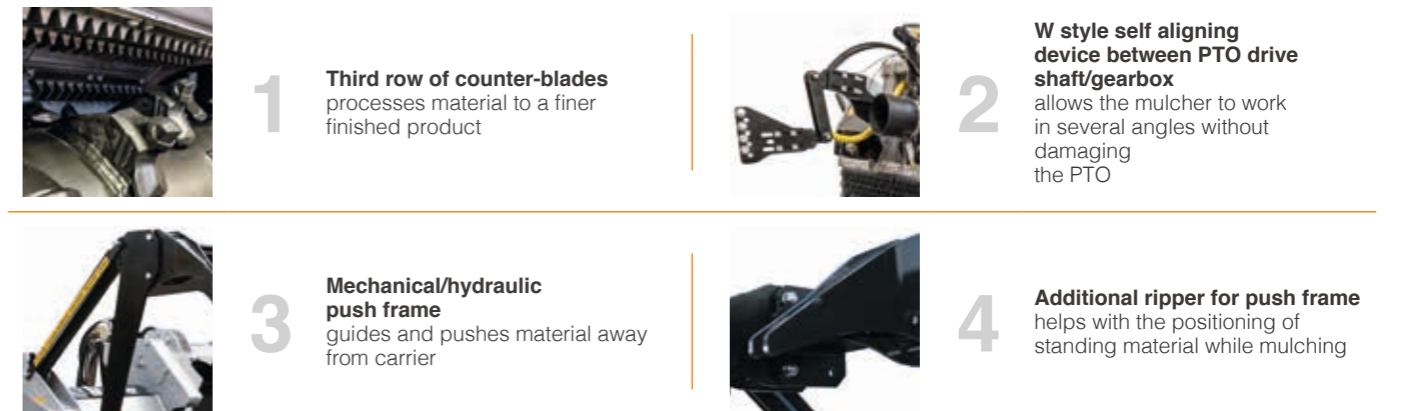

MODEL	Power (HP)		PTO (rpm)	Working width (mm)	Total width (mm)	Weight (kg)	Max shredding diameter (mm)	No. teeth type C/3 + C/3/SS	No. teeth type I + C/3/SS
	min	max							
UMM/DT 200	140	240	1000	2070	2470	2180	300	42+2	58+2
UMM/DT 225	150	240	1000	2310	2710	2430	300	46+2	66+2
UMM/DT 250	160	240	1000	2550	2950	2500	300	52+2	74+2

Data refers to machine as standard. The technical data in this catalog may be altered without prior notice.