

SRSC45E5

SANY

Quality Changes the World



FULL OF HIGH VOLTAGE

HIGHER, FURTHER, MORE EFFICIENT – 100 % ELECTRIC



REACH STACKER
SRSC45E5

Battery capacity

422kWh

Load capacities at row 1/2/3

45/31/15t

Wheel base

6000 mm

FULL ELECTRIC REACH STACKER



- + High efficiency and low consumption
- + Less maintenance requirements
- + Fast charging with dual gun
- + Reduced noise level

Travel speed max. 20 km/h

Overall weight

73 000 kg

Overall width

6 042 – 12 175 mm

Turning radius min.

8 100 mm

BATTERY

Type	Lithium iron phosphate (LFP)
Capacity	422 kWh
Warranty period	The attenuation in 5 years shall not exceed 30%
Full discharge cycle	> 2 800
Cooling mode	liquid
Continuous working time	6 – 9 h

CHARGER

Charging duration	1 – 1.5 h
Charging power	2*150 kW

ELECTRIC MOTORS

Travel motor power rated/peak	157 / 310 kW
Lift motor power rated/peak	160 / 270 kW

DRIVE AXLE

Drive axle type	Kessler D102
-----------------	--------------

BOOM

Lifting height max. (SANY Spreader)	15 100 mm
Lifting height min. (SANY Spreader)	1 120 mm
Tilting Angle	0 – 60°


TYRE

Tyre size	18.00-25
-----------	----------

SPREADER SANY

Manufacturer	SANY
Model	SDJ450H
Side shift	+/- 800 mm
Rotation angle	+105° / -195°
Mechanical pile slope (slope compensation)	-2° / +2°
Spreader weight (TW)	7 200 kg
Application	Top Lift

LOAD CHART

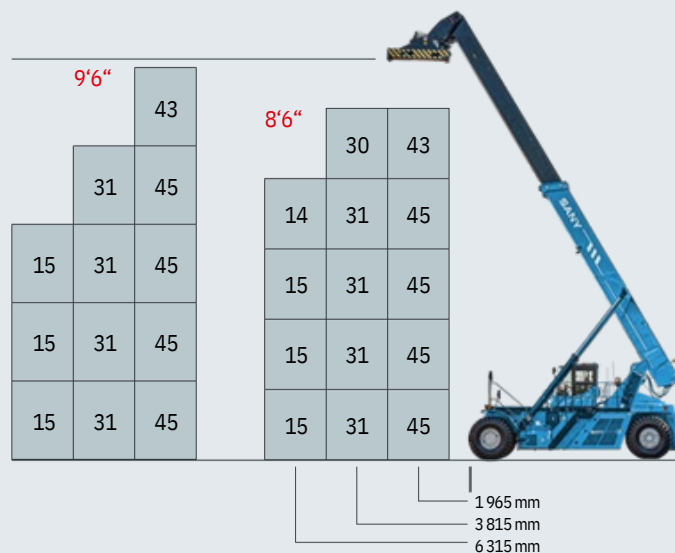

Not all products are available in all markets. As part of our continuous improvement process, we reserve the right to modify specifications and designs without giving prior notice. The figures may contain additional options.

SANY

Quality Changes the World