


SERIE SH

CIZALLA

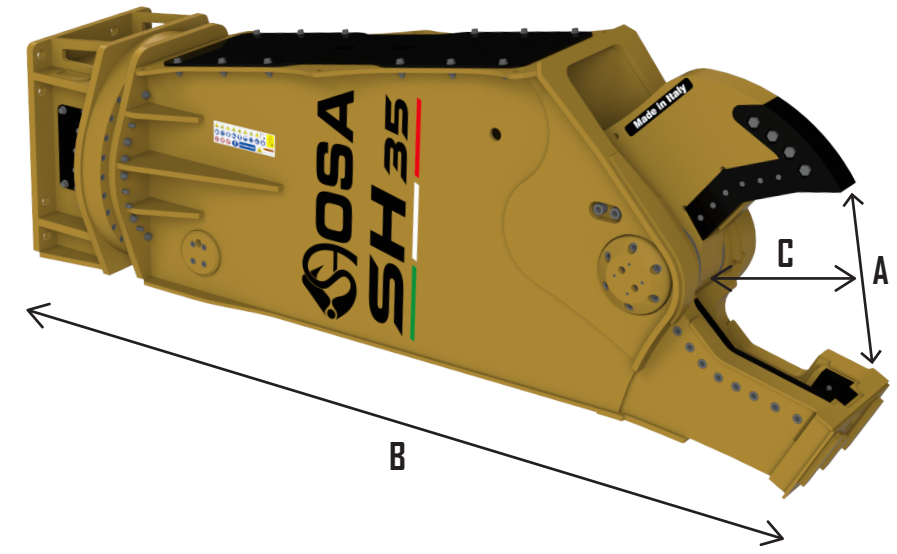

MODELO	U.M.	SH 6	SH 12	SH 20.1	SH 25.1	SH 35.1	SH 45	SH 55	SH 70	SH 80	SH 100	SH 120
APERTURA (A)	mm	365	440	530	580	690	700	800	850	870	900	950
OPENING (A)	in.	14	17	21	23	27	28	31	33	34	36	37
LARGO (B)	mm	1880	2450	2785	2840	3170	3361	4100	4700	4170	5000	5300
LENGHT (B)	in.	74	96	110	112	125	132	161	185	164	197	209
PROFUNDIDAD (C)	mm	240	400	495	510	570	690	690	800	850	900	950
DEPTH (C)	in.	9	16	19	20	22	27	27	31	33	35	37
PESO DE LA EXCAVADORA TERCER MIEMBRO	Ton	7/12	12/18	20/28	26/34	34/40	45/60	50/70	70/100	80/110	90/120	100/130
EXCAVATOR WEIGHT AT BUCKET PLACE	lbs	15400/26000	26000/39800	44000/61700	57300/75000	75000/88000	99210/132277	110000/155000	155000/220000	160000/240000	198000/264500	220000/286600
PESO DE LA EXCAVADORA SEGUNDO MIEMBRO	Ton	4/7	7/10	14/18	16/22	22/30	28/35	30/45	45/60	50/70	70/90	90/110
EXCAVATOR WEIGHT AT BOOM PLACE	lbs	8800/15400	15400/22000	25000/39600	35000/48500	48500/66000	61730/77161	66000/99000	99000/220000	111000/154000	154000/264500	198000/242500
PESO	Kg	640	1250	2030	2530	3200	4500	5630	6900	7830	9950	11500
WEIGHT	lbs	1411	2756	4475	5578	7055	9921	12412	15212	17262	21936	25353
PRESION DE ACEITE	Bar	250	310	340	340	340	340	340	340	340	340	340
OIL PRESSURE	psi	3626	4496	4931	4931	4931	4931	4931	4931	4931	4931	4931
FLUJO DE ACEITE	l/min	80/100	120/160	200/220	200/260	240/300	300/350	350/400	380/430	400/500	500/700	700/900
OIL CAPACITY	gal/min	21/26	31/42	53/58	53/68	63/79	79/92	92/106	100/113	106/132	132/185	185/238
PRESION ACEITE ROTACION	Bar	60	120/130	120/130	120/130	120/130	120/130	120/130	120/130	120/130	120/130	120/130
ROTATION OIL PRESSURE	psi	870	1740/1885	1740/1885	1740/1885	1740/1885	1740/1885	1740/1885	1740/1885	1740/1885	1740/1885	1740/1885
FLUJO ACEITE ROTACION	L/min	20	20/30	20/30	20/30	50/60	50/60	50/60	50/60	70/80	70/80	70/80
ROTATION OIL CAPACITY	gal/min	5	5/8	5/8	5/8	13/16	13/16	13/16	13/16	18/21	18/21	18/21