


UTM

UTM 750 is the most compact mobile plant for crushing and recycling of aggregates, asphalt, rubble and other materials, able to achieve maximum productivity, with minimum consumption.

The slow action of the grinder shafts ensures low noise pollution and low dust emissions

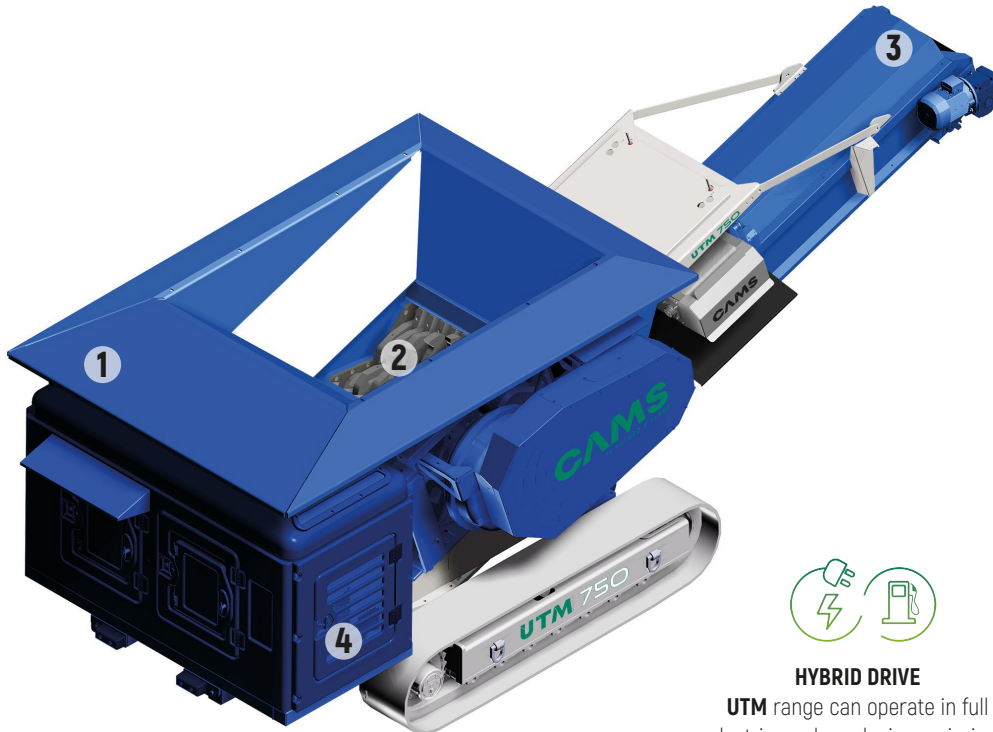

HYBRID DRIVE

UTM range can operate in full electric mode, reducing emissions (without diesel engine)

1 Hopper

Volume: 1.50 m³

Length: 2.30 m

Width: 1.70 m

2 Shredder

Model: FTR 750

Surface: mm 750 x 900

3 Main conveyor

Width: mm 600

Length: mm 5000

4 Genset

Engine: FTP F36 Stage V 90kW

Alternator: Linz 80 kVA

Fuel tank: 170 l

FEATURES

- Automatic programs for shredding different materials
- Ability to process wet materials
- Single genset for the supply of all components
- Low fuel consumption
- Designed for compact transport dimension
- High wear resistance
- Ability to supply electrical power
- Low emissions and acoustic pollution

OPTIONS

- GPS
- Belt scale
- Fuel pump
- Electrical greasing pump

Max. production

80 t/h

UTM 750	
Length	7.00 m
Height	2.50 m
Width	2.50 m
Weight	11'500 kg